

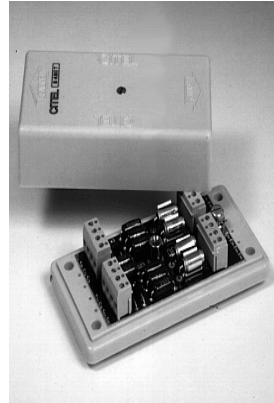


SURGE PROTECTOR CITEL/FRANCE

Images	Type	Iimp(kA)/1Pole (10/350µs)	Imax(kA) (8/20µs)	Max. Operating voltage	Protection level Up	Code	
AC Power surge protector							
Single phase (1P+N):							
	2	10	255	1		DUM10-230/G	
		40	255	1		DUM40-230/G	
		10	255	1.8		DS12-230/G	
		40	255	1.5		DS42-230/G	
		40	400	2		DS42-400	
		70	400	2,5		DS72R-400	
		15	140	400	2,5	DS152E-400	
		25	140	330	2,5	DS252E-300	
		25	140	330	2,5	DS252E-300/G	
		15	40	300	1,5	DS152VG-300	
		15	40	400	1,5	DS152VG-400	
		15	40	300	1,5	DS152VG-300/G	
		25	70	330	1,5	DS252VG-300	
		25	70	330	1,5	DS252VG-300/G	
		Tri phase (3P+N)					
	2	10	255	1.5		DUT10-230/G	
		40	255	1.5		DUT40-230/G	
		40	400	2		DS44-400	
		70	400	2,5		DS74-400	
		25	100	255	1.5		DUT250VG-300/G
		15	140	300	2		DS154E-300
		15	140	400	2,5		DS154E-400
		15	140	300	2		DS154E-300/G
		25	140	330	2,5		DS254E-300
		25	140	330	2,5		DS254E-300/G
		15	40	300	1,5		DS154VG-300
		15	40	400	1,5		DS154VG-400
		15	40	300	1,5		DS154VG-300/G
		25	70	330	1,5		DS254VG-300
		25	70	330	1,5		DS254VG-300/G
DC Power surge protector							
		2	30	105		DS210-24DC	
Data, tel, coaxial surge protector							
		CCTV				CXC06	
		2 pairs				B280-T	
		4 pairs				B480-T	
		ADSL				B180-T/MJ6	
		Ethernet 10/100 baseT				ZS-CAT5/CL	
		1000 BASE-T transmission speeds				MJ8-CAT6	
		Leased line 4-20mA (1-pair)				BP1-24D3	
		Leased line 4-20mA (2-pair)				B280-24D3	
			Coordination inductor trở kháng 15 micro Hz - 35A				DSH35
			Coordination inductor 15 micro Hz - 63A				DSH63
			Lightning counter				CF 01SH
Single phase surge protector and filter							
		10	400	0.8		DS-HF	